


# BSP Hexagon Reducing Bush

A Hexagon Reducing Bush can be used within piping systems to reduce the port sizes in valves and other fittings. This Hexagon Reducing Bush BSP Fitting is suitable for use in natural gas, LPG, hot and cold water, as well as many other applications.

- Made from CF8M (316) Stainless Steel material and conforms to ISO 4144 standard.
- Sizes range from 1/4" x 1/8" – 4" x 3'.
- Threads are to ISO 7-1 (DIN2999) BSPP Female, BSPT Male.

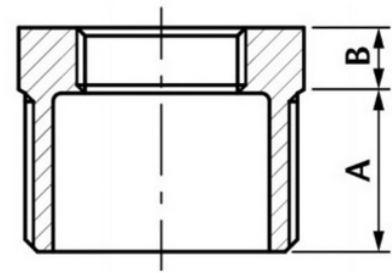

DN	A	B	C	D	E	Kgs
1/4" x 1/8"	8.4	15	12	12.5	19	0.013
3/8" x 1/8"	11	19	13	14	20.3	0.023
3/8" x 1/4"	11	19	10	14	20.3	0.021
1/2" x 1/8"	15	22.5	17	17	23.7	0.037
1/2" x 1/4"	15	22.5	15	17	23.7	0.035
1/2" x 3/8"	15	22.5	14	17	23.7	0.031
3/4" x 1/4"	20.5	29	16.4	18	26	0.066
3/4" x 3/8"	20.5	29	16.3	18	26	0.059
3/4" x 1/2"	20.5	29	15.8	18	26	0.048
1" x 1/4"	26	25.5	18.5	19	27	0.101
1" x 3/8"	26	35.5	18	19	27	0.095
1" x 1/2"	26	35.5	17.4	19	27	0.081
1" x 3/4"	26	35.5	13.6	19	27	0.067
1 1/4" x 1/2"	34.5	43.6	20.2	20.5	30	0.143
1 1/4" x 3/4"	34.5	43.6	18.2	20.5	30	0.141
1 1/4" x 1"	34.5	43.6	16	20.5	30	0.121
1 1/2" x 1/2"	40	51	22	22	31	0.206
1 1/2" x 3/4"	40	51	20	22	31	0.197
1 1/2" x 1"	40	51	17	22	31	0.185
1 1/2" x 1 1/4"	40	51	15.5	22	31	0.129

# BSP Hexagon Reducing Bush

DN	A	B	C	D	E	Kgs
2" x 1/2"	51	62.4	26	26	35	0.318
2" x 3/4"	51	62.4	23	26	35	0.325
2" x 1"	51	62.4	21	26	35	0.328
2" x 1 1/4"	51	62.4	20	26	35	0.274
2" x 1 1/2"	51	62.4	17.8	26	35	0.228
2 1/2" x 1 1/2"	64.5	77.8	24	30	40	0.572
2 1/2" x 2"	65	77.8	22.5	30	39.5	0.443
3" x 1"	77.2	91.2	30	33	44	0.875
3" x 1 1/4"	77.4	91.2	37.5	33	44	0.731
3" x 1 1/2"	77.2	91.2	26.6	33	44	0.871
3" x 2"	77.2	91.2	27.3	33	44	0.795
3" x 2 1/2"	77.2	91.2	20	33	44	0.589
4" x 2"	101.3	116.6	27	36	48	1.488
4" x 3"	101.3	116.6	23.3	36	48	1.203